




SERIES S555

Series S555 is a durable, compact fixture for ceiling or wall applications. The 3-sided diffuser (linear at the sides, prismatic on the face) allows for a wide light distribution with conservative energy use.

Removable end caps (using standard hardware) make re-lamping simple and quick.

Standard finish is powder-coat white applied over a pre-treated surface. Interior reflective surfaces are finished in high-gloss white (M.R.F. 90%).

All fixtures are UL listed, and are shipped wired and fully tested, 120V.

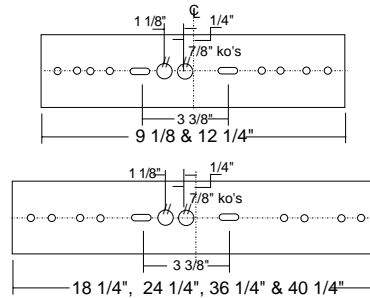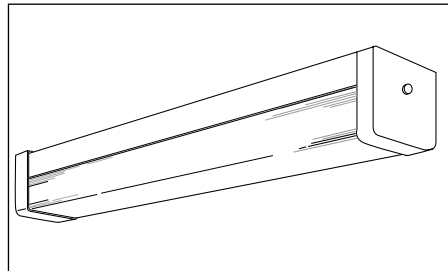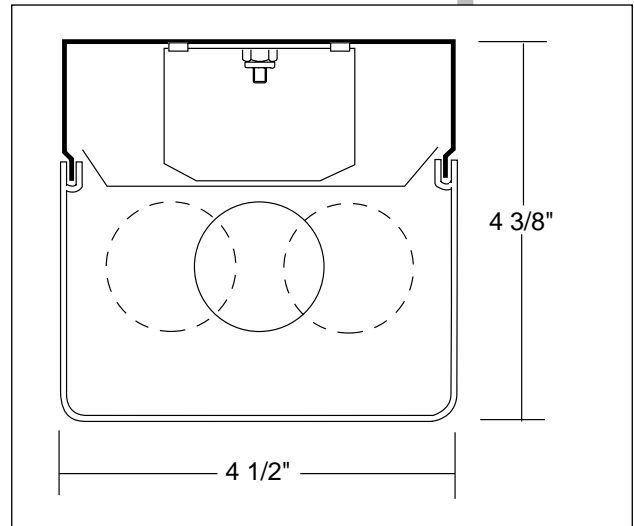

| MODEL NO. | LAMPS/WATTS | LENS | LENGTH |
|--------------|-------------|---------|---------|
| S555-19-A | 1-9W PL | Acrylic | 9 1/4" |
| S555-113-A | 1-13W PL | Acrylic | 12 1/4" |
| S555-139BX-A | 1-39W Biax | Acrylic | 18 1/4" |
| S555-120-A | 1-20W RS | Acrylic | 24 1/4" |
| S555-117-A | 1-17W OCT | Acrylic | 24 1/4" |
| S555-220-A | 2-20W RS | Acrylic | 24 1/4" |
| S555-217-A | 2-17W OCT | Acrylic | 24 1/4" |
| S555-130-A | 1-30W RS | Acrylic | 36 1/4" |
| S555-125-A | 1-25W OCT | Acrylic | 36 1/4" |
| S555-230-A | 2-30W RS | Acrylic | 36 1/4" |
| S555-225-A | 2-25W OCT | Acrylic | 36 1/4" |
| S555-140-A | 1-40W RS | Acrylic | 48 1/4" |
| S555-132-A | 1-32W OCT | Acrylic | 48 1/4" |
| S555-240-A | 2-40W RS | Acrylic | 48 1/4" |
| S555-232-A | 2-32W OCT | Acrylic | 48 1/4" |



a division of PMC Lighting Inc

SU-9