

Type





Date

SILEA II - SC2144-R

DIRECT/INDIRECT
T8, T5, T5HO or BIAX
"T" GRID

RECESSED D/I

PMCLIGHTING

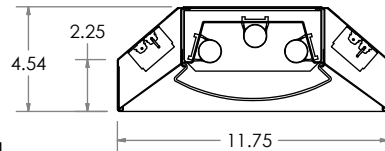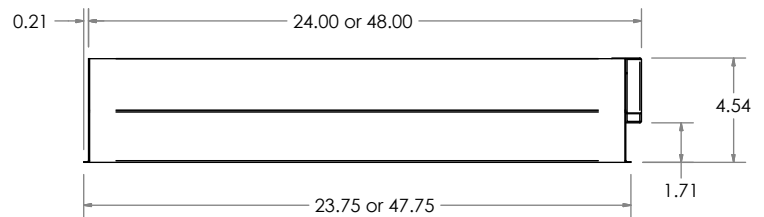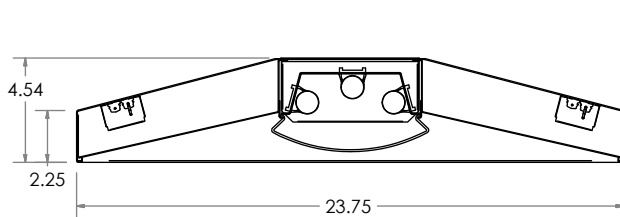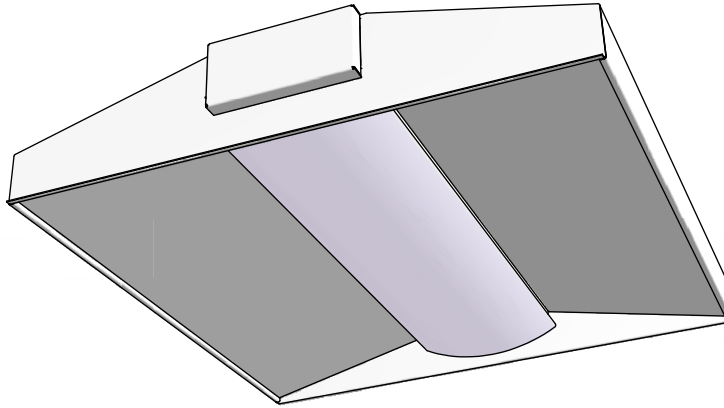

OPTIONS:

Output Options:

DI - Direct / Indirect

Mounting Options:

T - Standard T-Bar Ceiling
(Clips to hold T-Bar supplied)

Lamp Options:

BX - Biax (50w)
T5 - 5/8" Diameter Fluorescent
T5HO - 5/8" Diameter High Output Fluorescent
T8 - 1" Diameter Fluorescent

Diffuser Options:

FCA - 91% Transmissive Microlinear Frosted Lens

Color Options:

WHT - White Powder Coat (Standard)
CA - Custom Color (Consult Factory)

Voltage Options:

UNV - Universal voltage - 120/277v (Standard)
120V - 120 volt operation
277V - 277 volt operation
347V - 347 volt operation

Electrical Options:

2CIR - 2 Circuit Wiring
2 lamp - AB
3 lamp - ABA
4 lamp - ABBA
DIMG - Dimming ballast
DIMH - Lutron Hilume Dimming ballast

dimming by



GLR - In line fusing
EM - Emergency Battery Pack

PRODUCT SPECIFICATION DATA:

Construction: Die formed from heavy gauge cold rolled steel.
Finish: Standard fixtures are polyester powdercoated white. Reflective internal components are finished in high gloss white enamel (Min. Reflectance Factor = 90%)
Consult Factory for custom finishes.
Factory wired for ease in installation.
Ballast accessible from below ceiling.
Chicago Plenum-CCEA - consult factory.

Fixtures are UL/CUL listed for Damp Location, and have **standard electronic ballasts**.
Each fixture is lamp-tested at the factory before shipment.

ORDERING INFORMATION

Series	Output	Mounting	Lamps / Type	Width	Length	Diffuser	Color	Voltage	Electrical
SC2144-R	DI	T		X		FCA			
	DI	T	1 BX 2 T5 3 T5HO T8	1' 2'	2' 4'	FCA	WHT (STANDARD) CA (CUSTOM- CONSULT FACTORY)	UNV (STANDARD) 120V 277V 347V	(CONSULT FACTORY FOR ALL OPTIONS) 2CIR DIMG DIMH EM GLR



PMCLIGHTING

SILEA II - SC2144-R

DIRECT/INDIRECT
T8, T5, T5HO or BIAx
"T" GRID

FIXTURE MODEL TESTED - FROM IES FILE REPORT

PHOTOMETRICS

FIXTURE MODEL TESTED - FROM IES FILE REPORT

CONSULT FACTORY FOR PHOTOMETRIC DATA ON FIXTURE CONFIGURATIONS NOT SHOWN.

