


Type

Date

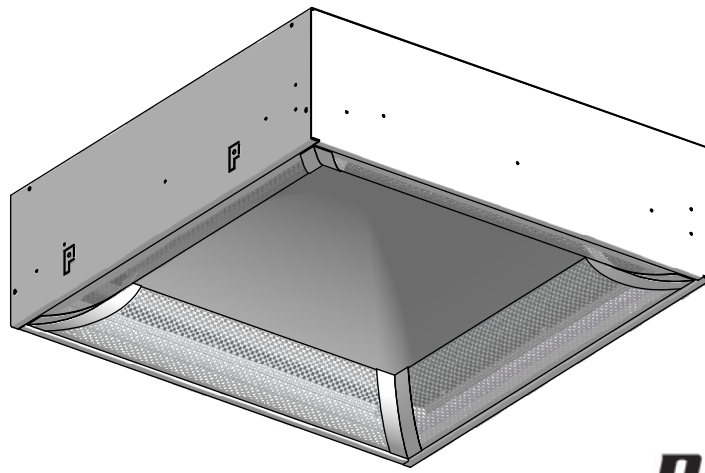


# SS42-R & SS44-R

DIRECT / INDIRECT  
T5, T5HO or 55W BIAx  
"T" GRID MOUNTING

DIRECT / INDIRECT



Lamps: Supplied by others

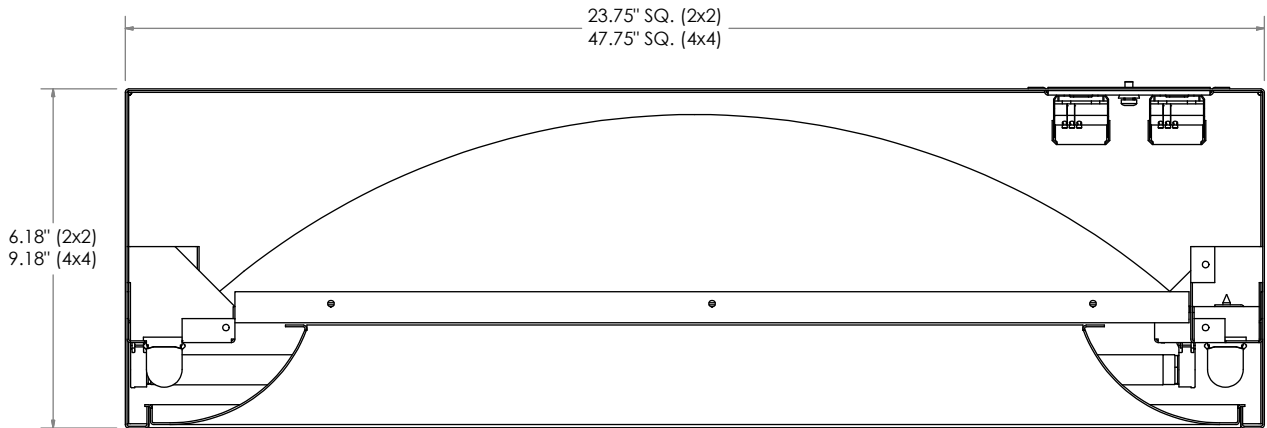

**PRODUCT SPECIFICATION DATA:**

The SS42-R and SS44-R series is a direct/indirect recessed fixture that combines recessed advantages with efficient shielded light output. SS42-R and SS44-R fixtures have powdercoated housings, with precision formed, high reflectance enamel reflectors for optimal optical efficiency. The 4-sided perforated steel basket is retained using torsion springs for easy relamping or removal.

Fixtures are UL listed for damp location, and have standard electronic ballasts. Each fixture is lamp-tested at the factory before shipment.

## ORDERING INFORMATION

Series	Output	Mounting	Lamp / Type	Length	Diffuser	Color	Voltage	Electrical
SS42-R SS44-R	DI	T	4 BX T5 T5HO	2' 4'	PERF	WHT (Standard) CA Custom Color	UNV 120V 277V 347V	2CIR DIM EM GLR

**\*NOTE:  
NOT AVAILABLE WITH  
40 or 50W BIAx LAMPS  
(22.5" LENGTH)**

**OPTIONS:**

**Mounting Options:**

T - Standard T-grid ceiling (*T clips supplied*)

**Lamp Options:**

- BX - 55W biax lamp (20.7" length)
- T5 - 5/8" diameter lamp
- T5HO - 5/8" diameter lamp (*High output*)

**Diffuser Options:**

PERF - 4 sided perforated steel basket w/ white opal overlay

**Color Options:**

- WHT - White (*Standard*)
- CA - Custom colors

**Options:**

- 347V - 347 volt operation
- 2CIR - 2 circuit wiring
- DIM - Dimming ballast (*Consult factory*)
- EM - Emergency ballast
- GLR - In line fusing